



FITTING INSTRUCTIONS FOR


Light Cargo Barrier

SKU

KS0381

COMPATIBILITY

Toyota Kluger Gen 2, 2008-2013

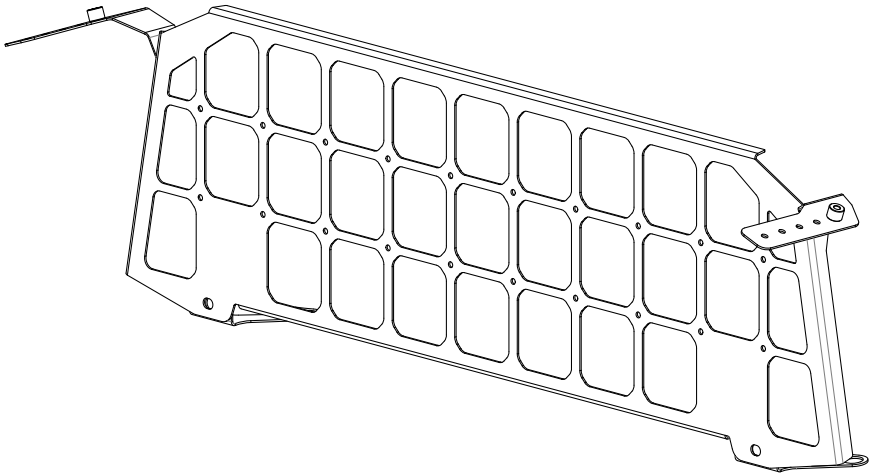

Included contents

QTY	COMPONENT	QTY	COMPONENT
1	Light Cargo Barrier	2	M6 x 16 Hex Head Bolts
2	Headrest Brackets	2	M6 DIN Washers
2	Barrier Brackets (LHS & RHS)	2	M6 x 30 Threaded Knobs
2	Plastic Spacers	2	M10 x 20 Threaded Knobs



Time

30 minutes / Half a beer

For further information contact KAON on **07 3180 1470** or info@kaon.com.au

Bolt Torque

DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	5 Nm	9 Nm	22 Nm	44 Nm	77 Nm

Let's get to work.

Preparation

1. Locate the plastic trim cap above the rear windows in the back of the vehicle.
2. Gently pry the cap open, and remove the screw to reveal the captive hole underneath. Remove the plastic trim surround and cap.
3. Remove the headrests from the back seat. Thread the headrest pins through the Headrest Brackets, taking care to ensure the face with the captive nut is at the back and pointing upwards.
4. Install the Barrier Bracket to the side of the Cargo Barrier using the M6 Hex Bolts, matching the orientation pictured.



Installation

1. Thread the M6x30 Threaded Knob through the Barrier Bracket, the Plastic Spacer and then into the captive hole we revealed earlier. There are four points of adjustment, depending on the upright position of your rear seats.
2. Next, use M10 x 20 Threaded Knob to attach the Cargo Barrier to the Headrest Brackets.
3. That's it, you're done! To remove it, all you have to do is undo the four Threaded Knobs. The brackets can stay in place when the Cargo Barrier is out of use.





Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.

For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of its products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve its products and reserves the right to make changes to any product.