



FITTING INSTRUCTIONS FOR

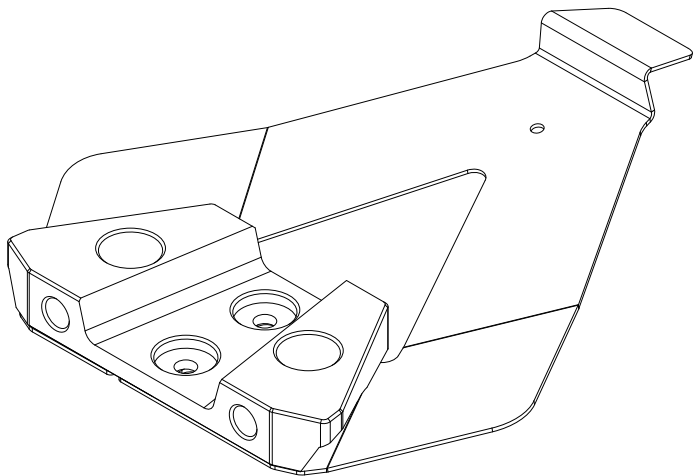
StarDock Quick Release Mount

SKU

KS1089

COMPATIBILITY

Platform & Cross Bar Racks



Included contents			
QTY	COMPONENT	QTY	COMPONENT
1	StarDock Locking Wedge	2	M8 Unistrut Nut
1	StarDock Base Plate	2	M8 x 16 x 1.5 Washer
2	SwitchBolt	2	M8 Nyloc Nut
2	SwitchBolt Retainer	2	M8 x 20 Hex Head Bolt

 **Time**

5 minutes / Sip of Beer

Scan the **QR code** to watch the video installation guide,
or for further information contact KAON on **07 3180 1470** or **info@kaon.com.au**



G8.8 Bolt Torque (Non-Lubricated)

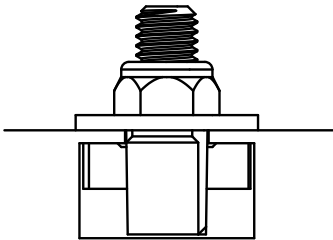
DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	6 Nm	10 Nm	15 Nm	22 Nm	35 Nm

Which hardware you'll need.

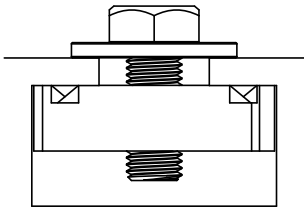
We've made sure to source the hardware you'll need for your specific type of roof rack, so you can get your awning up as hassle-free as possible.

The following fastening hardware will vary, based on which roof rack you are mounting to.

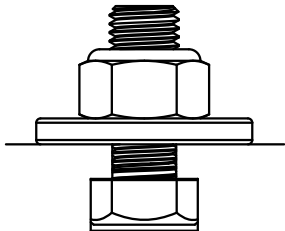
Rhino-Rack / Yakima / ROLA/ Thule

QTY	COMPONENT	
4	SwitchBolt Tee Bolt	
4	SwitchBolt Retainer	
4	M8 Nyloc Nut	
4	M8 x 16 x 1.5 Washer	

HD and Aero Cross Bars

QTY	COMPONENT	
4	M8 x 20 Hex Head Bolt	
4	M8 x 16 x 1.5 Washer	
4	M8 Unistrut Nut	

Front Runner

QTY	COMPONENT	
4	M8 Nyloc Nut	
4	M8 x 16 x 1.5 Washer	
4	M8 X 20 Hex Head Bolt	

Let's get to work.

Preparation

1. Determine where you would like to run your Starlink Mini, by mocking up the position of the base plate on your roof rack. We recommend installing it on the outer slats with the small folded edge facing outwards for the easiest access to your Starlink.

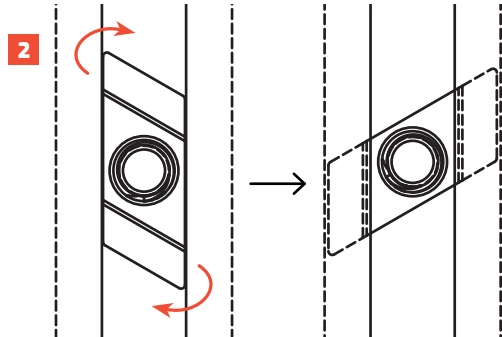
Determine which of the mounting points you will use on the base plate based on the type of roof rack and direction you are mounting.



Installation

2. **If you are installing on a Rhino-Rack, Yakima or relevant rack:** Place two SwitchBolts in the channel, sitting in line with the openings on the base bracket. Twist each bolt so that it sits flush against the sides of the channel, as pictured.

Secure each bolt's position with a retainer over the top.



Installation cont.

3. If you are installing to a Front Runner or Cross Bar Rack:

slide 2 of the specific captive fasteners for your roof rack (see hardware breakdown on page 3), into a channel.

Please note that if you are installing to a cross bar rack with a deeper channel it will be easier to pre-assemble the mount loosely with the hardware and drop the unistrut nuts into the channel instead.

4. Place the base plate over the bolts, and then the locking wedge in position over the top. Secure the mount's position using the nyloc nut and washer, but do not tighten fully.
5. Slide the Starlink Mini into position on the mount. Check that it clicks into place securely, and that the release tab is sitting high and snug against the side of the Starlink as pictured.

If it is either too loose or too tight, you may need to adjust the locking wedge backwards or forwards to ensure that the Starlink sits correctly and is fully secure.

6. With the position confirmed, remove the Starlink and tighten the hardware until secure.
7. That's it – you're done!
You've now got a convenient and easy to access spot for your Starlink. To release, simply push down on the small folded tab and pull the Starlink backwards out of the mount.



This page has been left intentionally blank.

This page has been left intentionally blank.



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.

For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of its products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve its products and reserves the right to make changes to any product.